



# CITROEN RELAY / FIAT DUCATO / PEUGEOT BOXER (2006 – Onwards )

## CONNECTING THE CAMERA

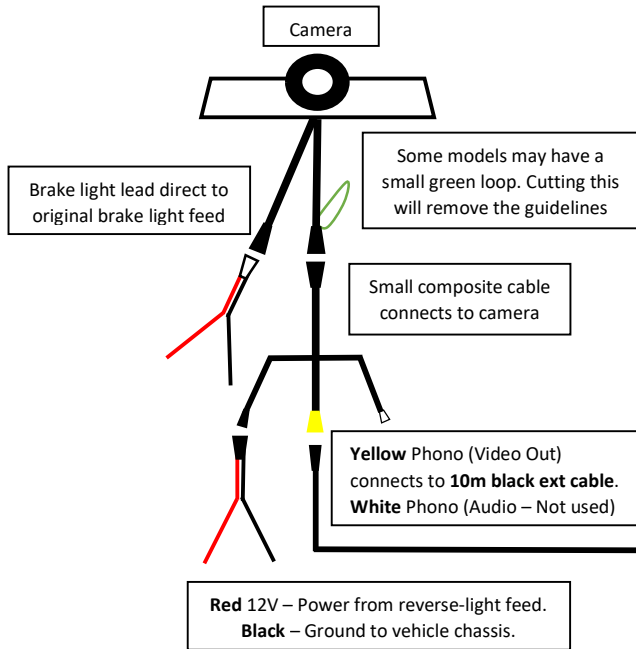

## CONNECTING THE MONITOR

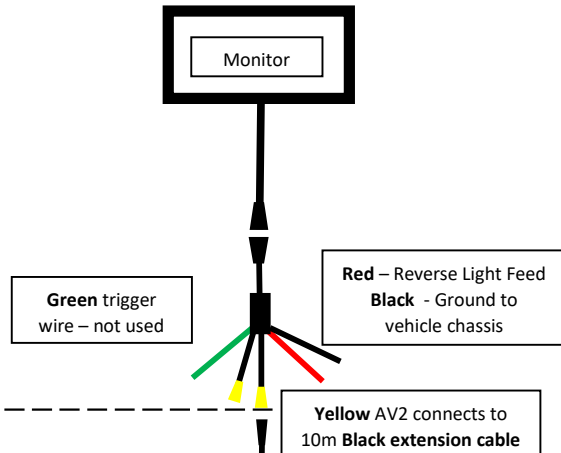

## INSTRUCTIONS

- Connect brake light power directly to original brake light feed using brake light cable.
- Connect the POWER LEAD to COMPOSITE CABLE and then RED 12v cable to reverse light feed.
- Connect POWER LEAD BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect the monitor RED cable to the reverse light feed and BLACK to vehicle chassis.
- The Optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.

## SPECIFICATIONS

<b>Sensor:</b>	CMOS 7070
<b>Resolution:</b>	P/N: 648 x 488
<b>TV Line:</b>	420 TV line
<b>Lens:</b>	1.7mm
<b>Min Illumination:</b>	0Lux (LED ON)
<b>IR LED:</b>	6pcs
<b>Night Vision Distance:</b>	35ft
<b>Waterproof:</b>	IP68
<b>View Angle:</b>	170°
<b>Power Voltage:</b>	12V
<b>Operation Temp:</b>	-20°C ~ +70°C

## IN THE BOX



## WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.



Dolphin Automotive is a Trademark of Trading Direct Ltd.  
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU  
Tel: 01483 522 225 [www.dolphin-automotive.co.uk](http://www.dolphin-automotive.co.uk)