


CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

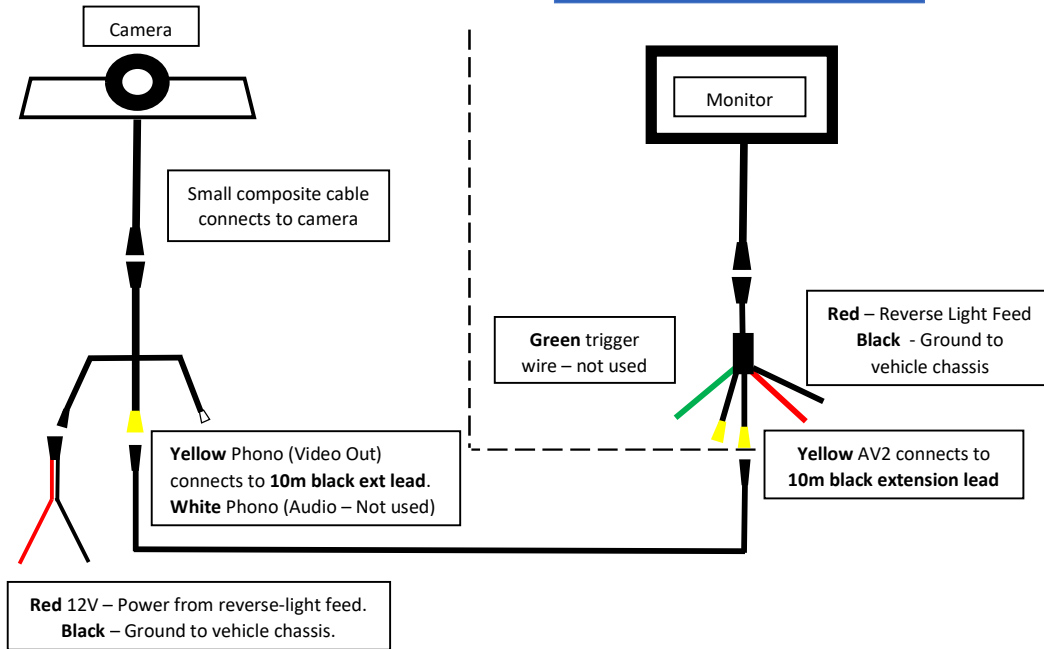

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

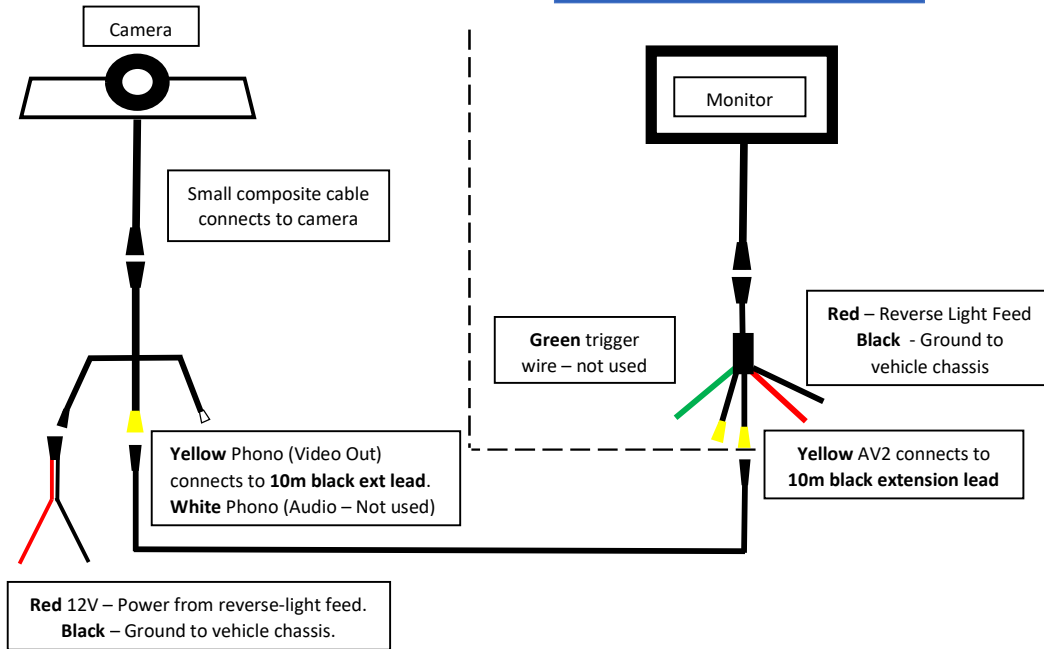

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

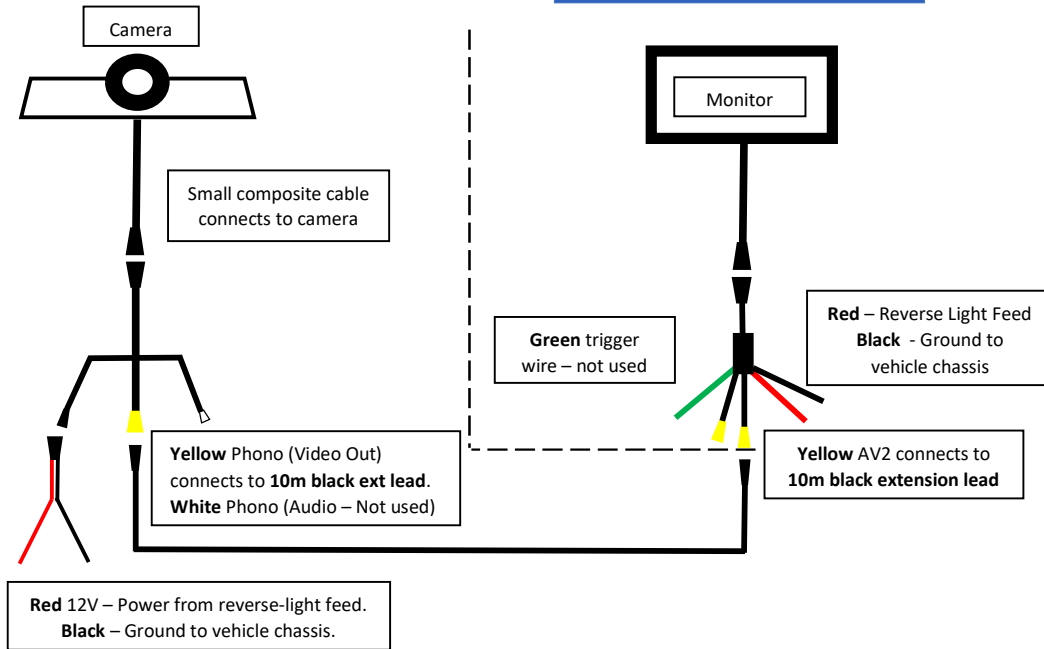

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

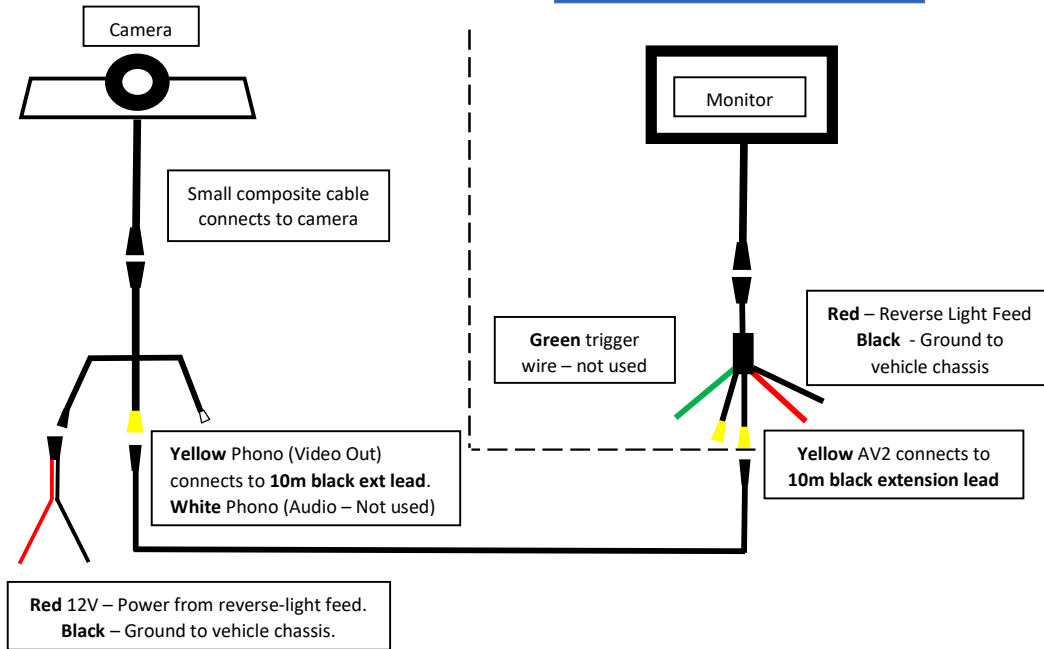

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

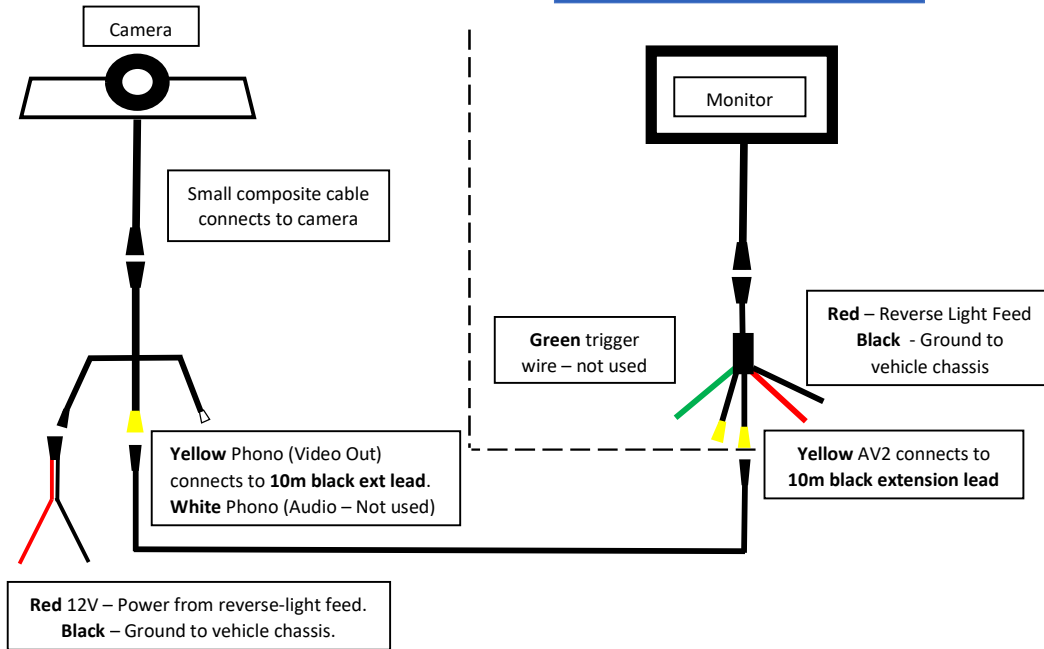


INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX

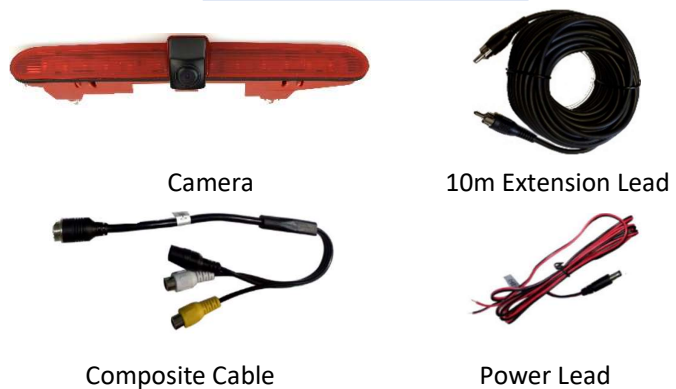

WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

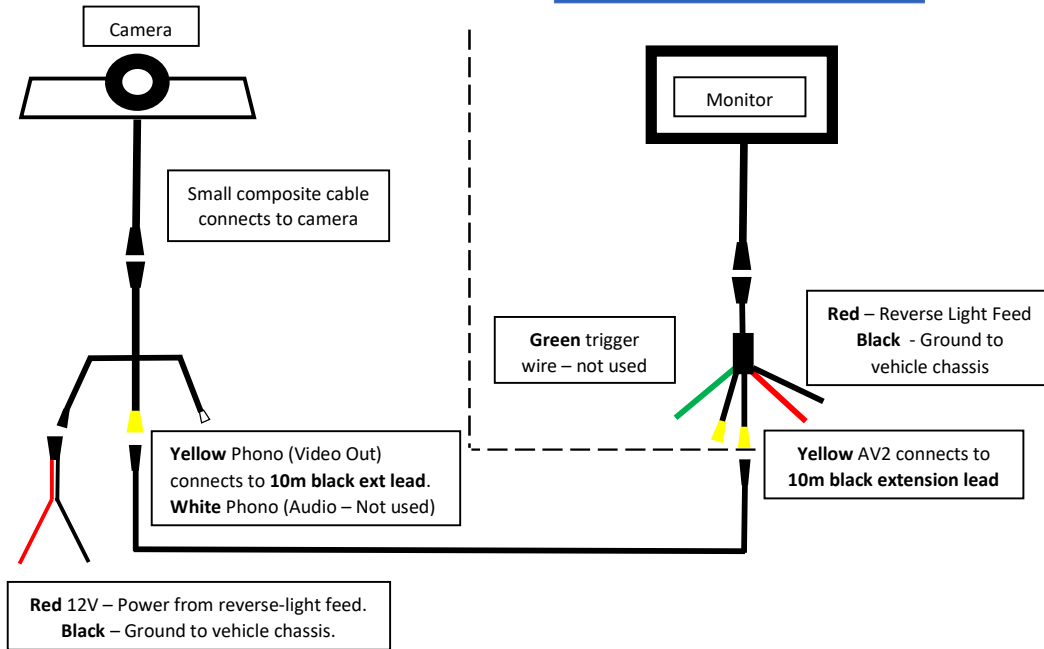

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



Camera

10m Extension Lead

Composite Cable

Power Lead

WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

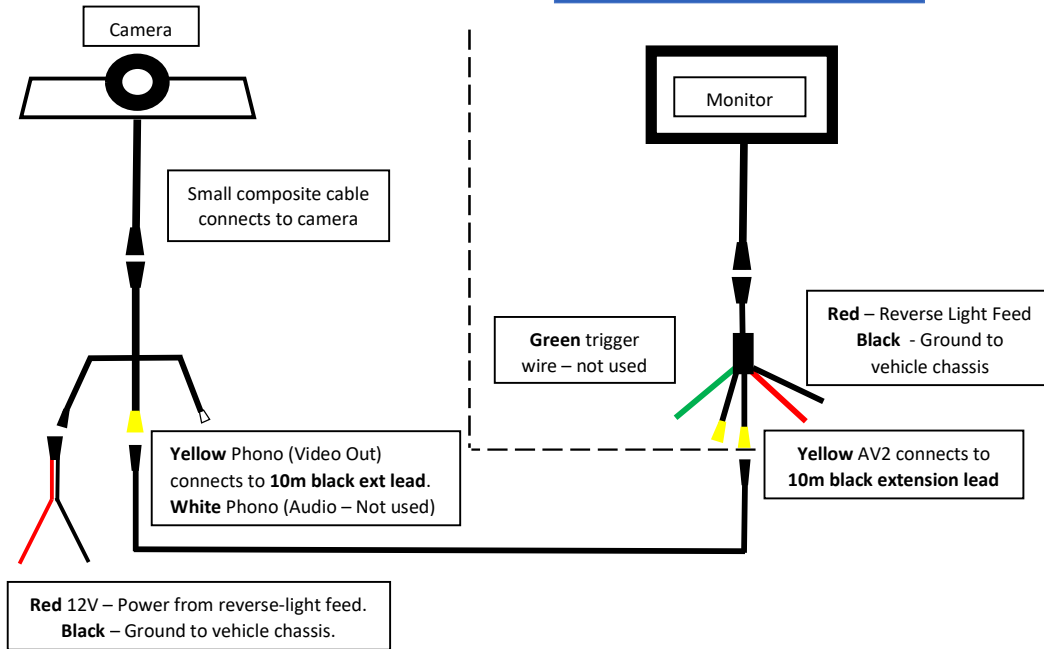

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



Camera

10m Extension Lead

Composite Cable

Power Lead

WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

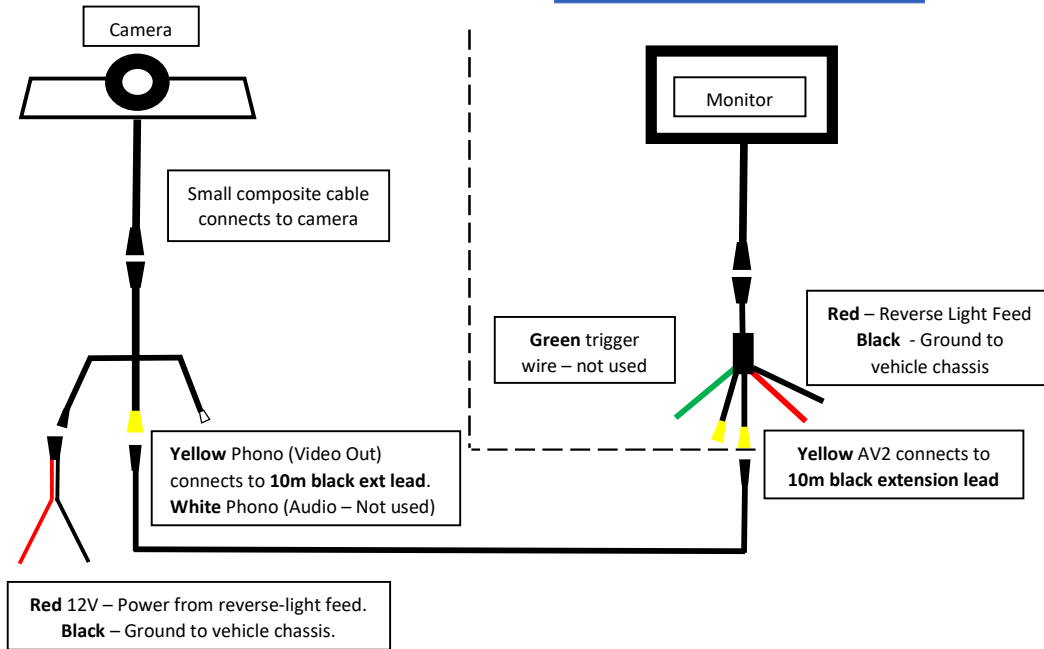


INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX

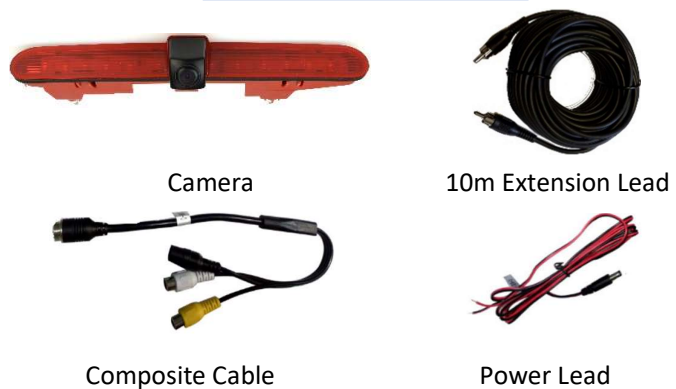

WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

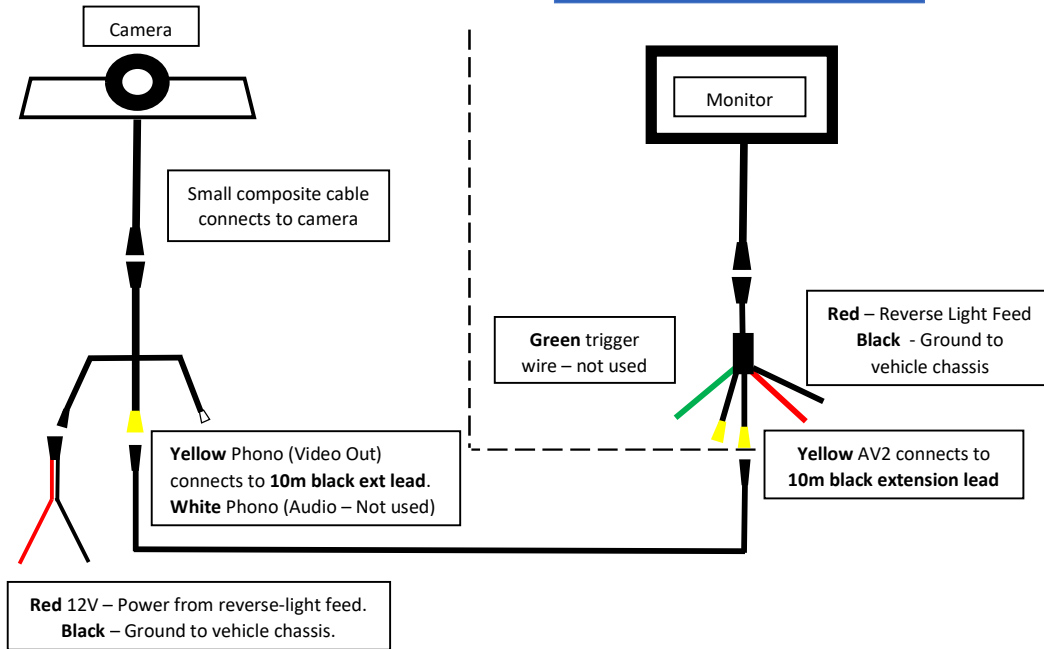

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

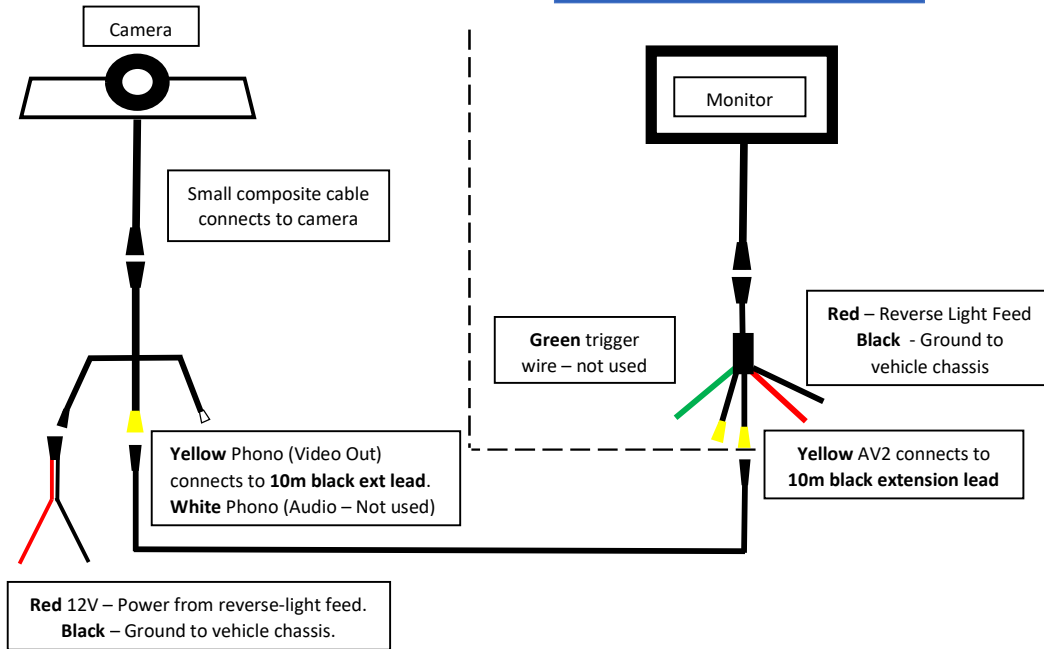

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

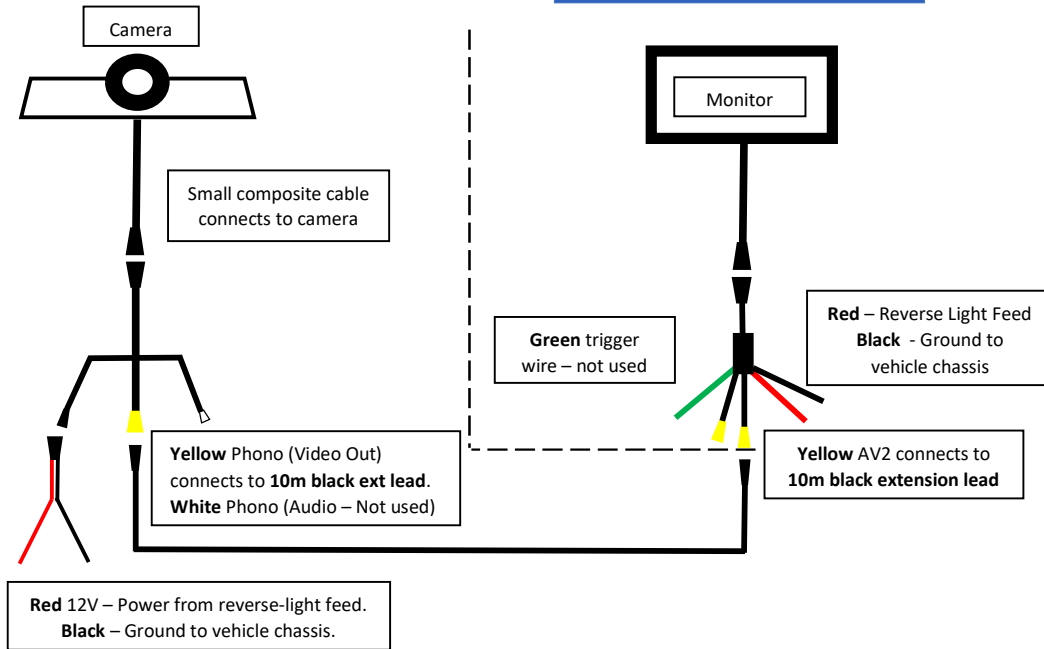

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.




Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk

CITROEN BERLINGO II / PEUGEOT PARTNER II 2018 – ONWARDS 3rd GEN.
VAUXHALL COMBO E 2018 – ONWARDS / TOYOTA PROACE 2020 - ONWARDS

CONNECTING THE CAMERA

CONNECTING THE MONITOR

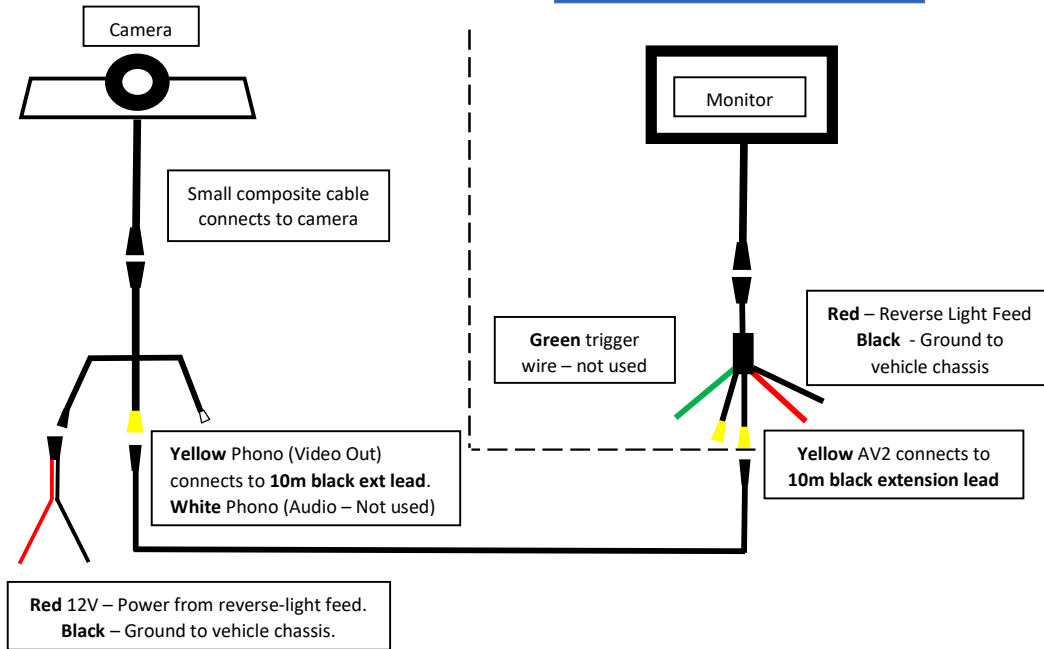

INSTRUCTIONS

- Remove rubber grommet where rear washer jet is fitted.
- Connect the camera RED 12v cable to reverse light feed & BLACK ground cable to vehicle chassis.
- Connect YELLOW phono video out to BLACK 10m extension cable.
- Where the monitor has more than one AV connection – connect to AV2 (N/A for smaller monitors).
- Connect monitor RED cable to the reverse light feed and BLACK to ground / chassis.
- The optional GREEN trigger wire will not need to be used in this version of installation.
- Monitor should be in the OFF position and will come on automatically when reverse is engaged.
- **Includes LED Brake Light BUT Insert Original Bulb Into Rear Internal Bulb Fitting On Replacement Brake Light Camera to Avoid Warning Light Alert On Dashboard.**

SPECIFICATIONS

Mirror Image	
1/3 CMOS, 700 TVL	
Waterproof:	IP68
View Angle:	170°
Power Voltage:	12V
Operation Temp:	-20°C ~ +70°C

IN THE BOX



WARRANTY AND SUPPORT

This product comes with a 12 month warranty against defects in material and workmanship. This does not apply if, in our judgement, the product fails due to damage from an accident, abuse, misuse or if it has been modified. This product has been designed for DIY installation. Dolphin Automotive takes no responsibility for any damage caused to vehicles from installation.



Dolphin Automotive is a Trademark of Trading Direct Ltd.
Unit 2, Francis Place, The Green, Pirbright, Woking, GU24 0JU
Tel: 01483 522 225 www.dolphin-automotive.co.uk